




INDUSTRIAL CASTERS

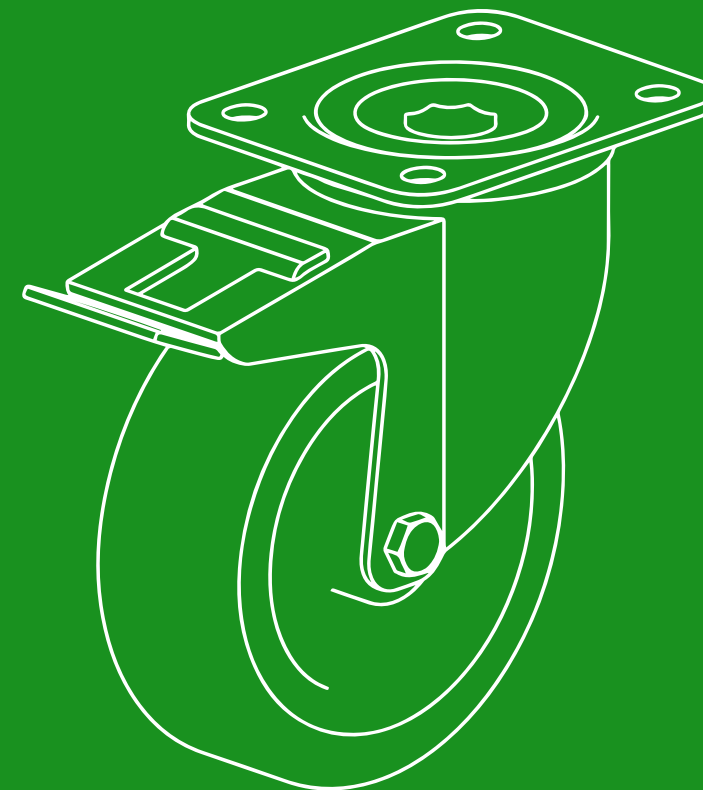

🌐 **Web:** bullcaster.com

✉ **Mail:** info@bullcaster.com

☎ **Tel:** +86 15813668894

💬 **WhatsApp:** 008615813668894

👤 **Wechat:** Bullcaster

📍 **Factory Add:** No. 39, Xiluxian Industrial Zone, Beisha Village, Nanhai District,
Foshan City, Guangdong Province

COMPANY PROFILE



Welcome to Bullcaster, your reliable supplier of high-quality casters wheels in Guangdong Province, China.

With 20 years of experience in the caster industry, we provide a wide range of casters for various applications.

We manufacture industrial casters, trolley wheels, etc. The materials of our casters include polyurethane, PVC, rubber, nylon, PP, cast iron, TPR, stainless steel, etc., to meet the needs of multiple application scenarios.

We have the expertise and resources to meet your needs. Contact us today to learn more about our products and services and discover why Bullcaster is the right choice for your caster needs.



Exhibition



Detection Center



20 YEARS
PRODUCTION EXPERIENCE



2000+
SKU



5000m²
WORKSHOP



100+
EXPORTING COUNTRIES

CONTENTS



**MEDIUM LIGHT
DUTY SERIES**

5-10



**HEAVY DUTY
SERIES**

19-26



**LOW PROFILE
CASTERS**

29-30



**MEDIUM DUTY
SERIES**

11-18



**SUPER HEAVY
DUTY CASTERS**

27-28



**WASTE BIN
CASTERS**

31-32


MEDIUM LIGHT DUTY SERIES

Lightweight casters, suitable for low-load applications, available in a variety of wheel materials, and can be upgraded to stainless steel brackets and stainless steel bearings.

LOAD
20-70KG




STRUCTURAL DIAGRAM

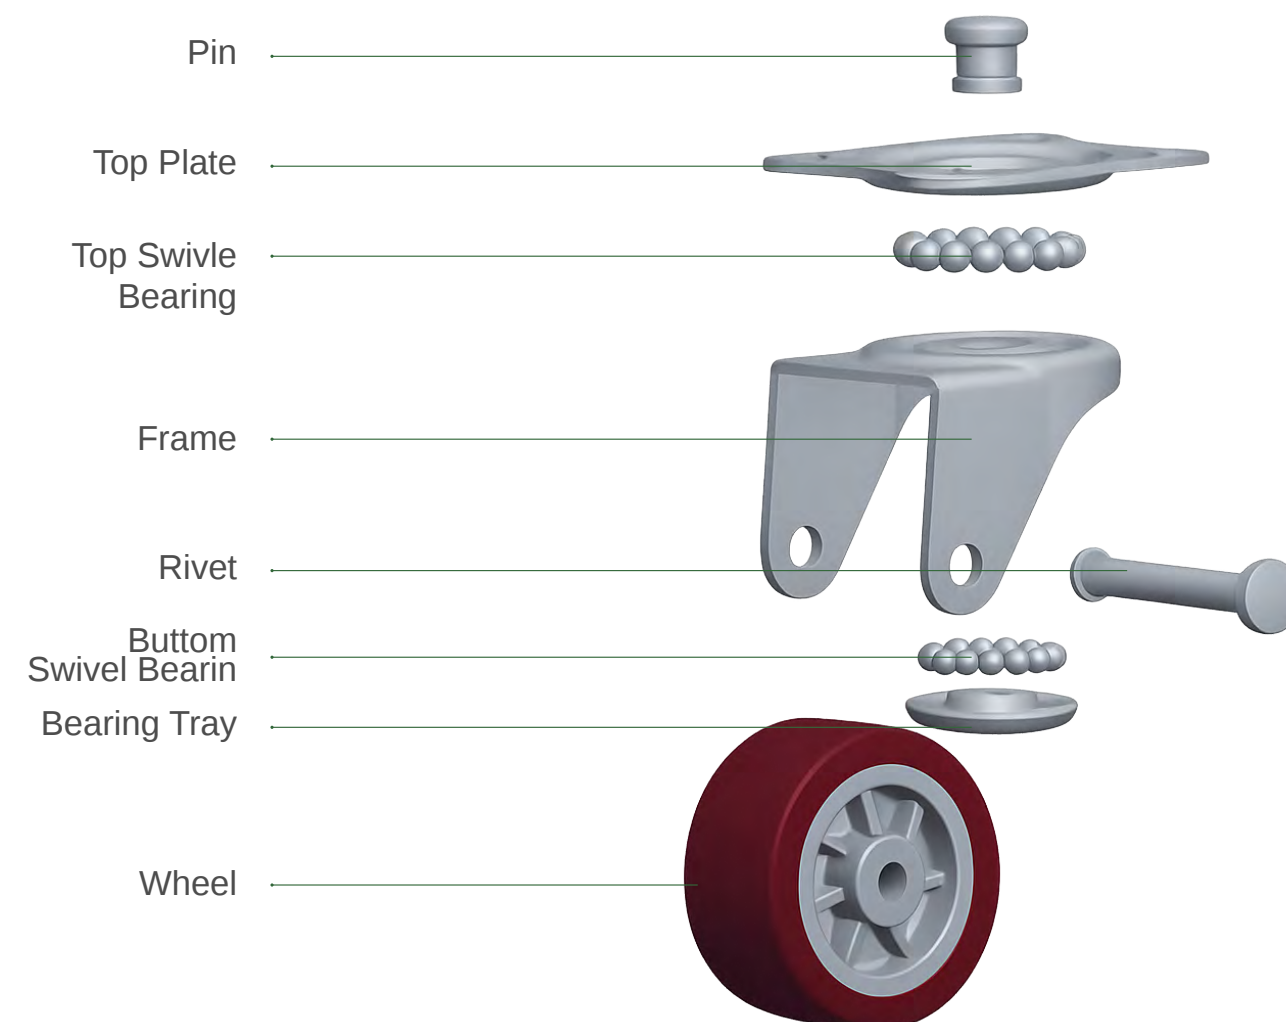

OPTIONAL STANDARD WHEELS



No ball bearings, plain.



Double Ball Bearings

LIGHT DUTY PP CASTER



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height of Installation	Plate Thickness	Holder Thickness	Thread Size	Radius of Rotation	Installation Size
										
1.5"	38	18	25	—	50	2.0	1.5	M8x15 M10x20	35	36x28
2"	50	22	40	—	65	2.0	2.0	M10x20 M10x25	50	47x36
2.5"	65	27	55	—	82	2.5	2.5	M12x25	61	54x42
3"	75	29	75	—	92	2.5	2.5	M12x25	65	54x42

LIGHT DUTY PP CASTER (BOUBLE BEARING)



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height of Installation	Plate Thickness	Holder Thickness	Thread Size	Radius of Rotation	Installation Size
										
1.5"	40	23	45	698 Double Ball Bearing	62	2.0	2.0	M10x25	41	(A)66x38 (B)48x30
2"	50	28	65	6000 Double Ball Bearing	76	2.0	2.0	M10x25	52	(A)70x55 (B)52x36
2.5"	65	32	90	6001 Double Ball Bearing	95	3.5	2.75	M12x25	67	(A)92x62 (B)73x45

LIGHT DUTY PU CASTER



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height of Installation	Plate Thickness	Holder Thickness	Thread Size	Radius of Rotation	Installation Size
										
1.5"	38	18	23	—	50	2.0	1.5	M8x15 M10x20	35	36x28
2"	50	22	35	—	65	2.0	2.0	M10x20 M10x25	50	47x36
2.5"	65	27	50	—	82	2.5	2.5	M12x25	61	54x42
3"	75	29	65	—	92	2.5	2.5	M12x25	65	54x42

LIGHT DUTY PU CASTER (BOUBLE BEARING)



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height of Installation	Plate Thickness	Holder Thickness	Thread Size	Radius of Rotation	Installation Size
										
1.5"	40	23	45	698 Double Ball Bearing	62	2.0	2.0	M10x25	41	(A)66x38 (B)48x30
2"	50	28	50	6000 Double Ball Bearing	76	2.5	2.0	M10x25	52	(A)70x55 (B)52x36
2.5"	65	32	85	6001 Double Ball Bearing	95	3.5	2.75	M12x25	67	(A)92x62 (B)73x45

LIGHT DUTY TPR CASTER



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height	Radius Rotation	Bolt Hole (mm)	Plate Size	Thread Stem Size
									
2"	50	22	40	—	72	50	10	(A)50x50 (B)35x35	M12x20
3"	75	29	60	—	101	65	10	(A)65x65 (B)45x45	M12x20

LIGHT DUTY TPR CASTER (DOUBLE BEARING)



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height	Radius Rotation	Plate Thickness	Plate Size
								
1.5"	40	20	40	608 Double Bearing	87	41	2	(A)64x48 (B)48x30
2"	50	23	50	609 Double Bearing	71	52	2	(A)70x55 (B)52x36
2.5"	65	32	70	610 Double Bearing	90	67	3.5	(A)92x62 (B)73x54

LIGHT DUTY PA NYLON CASTER



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height of Installation	Plate Thickness	Holder Thickness	Thread Size	Radius of Rotation	Installation Size
										
1.5"	38	18	25	—	50	2.0	1.5	M8x15 M10x20	35	36x28
2"	50	22	40	—	65	2.0	2.0	M10x20 M10x25	50	47x36
2.5"	65	27	55	—	82	2.5	2.5	M12x25	61	54x42
3"	75	29	75	—	92	2.5	2.5	M12x25	65	54x42

LIGHT DUTY PA CASTER (DOUBLE BEARING)



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height of Installation	Plate Thickness	Holder Thickness	Thread Size	Radius of Rotation	Installation Size
										
1.5"	40	23	45	698 Double Ball Bearing	62	2.0	2.0	M10x25	41	(A)66x38 (B)48x30
2"	50	28	65	6000 Double Ball Bearing	76	2.0	2.0	M10x25	52	(A)70x55 (B)52x36
2.5"	65	32	90	6001 Double Ball Bearing	95	3.5	2.75	M12x25	67	(A)92x62 (B)73x45

MEDIUM DUTY SERIES

Medium duty casters, available in a variety of wheel materials, and can be upgraded to stainless steel brackets and stainless steel bearings.

LOAD
100 - 200KG



STRUCTURAL DIAGRAM



OPTIONAL BRACKET AND BRAKE TYPES

Zinc plated (Z) or electrophoresis (E) is available

Can choose metal brake(A) or plastic brake(B)



3BZ



3AE



Single Bearing Grey PP Wheel



Double Bearing White PP Wheel




Single Bearing Grey TPR Wheel



Double Bearing Black PU Wheel




Single Bearing Brown PU Wheel

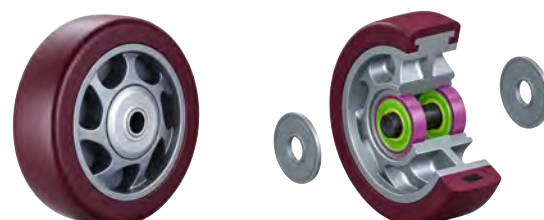

Double Bearing Brown PU Wheel



Single Bearing Black PU Wheel

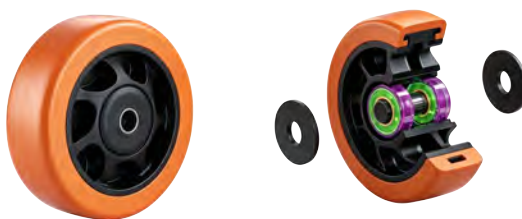

Double Bearing Orange PU Wheel

MEDIUM DUTY PP CASTER (SINGLE BEARING)



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height of Installation	Thread Size	Radius of Rotation	Installation Size
								
3"	75	32	115	6202 Single Ball Bearing	107	M12x25	72	(A)92x62 (B)73x45
4"	100	32	140	6202 Single Ball Bearing	130	M12x25	84	(A)92x62 (B)73x45
5"	125	32	155	6202 Single Ball Bearing	156	M12x25	95	(A)92x62 (B)73x45

MEDIUM DUTY PP CASTER (DOUBLE BEARING)



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height of Installation	Thread Size	Radius of Rotation	Installation Size
								
3"	75	32	125	6001 Double Ball Bearing	107	M12x25	72	(A)92x62 (B)73x45
4"	100	32	140	6001 Double Ball Bearing	130	M12x25	84	(A)92x62 (B)73x45
5"	125	32	160	6001 Double Ball Bearing	145	M12x25	95	(A)92x62 (B)73x45

MEDIUM DUTY PU CASTER (SINGLE BEARING)



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height of Installation	Thread Size	Radius of Rotation	Installation Size
								
3"	75	32	100	6202 Single Ball Bearing	107	M12x25	72	(A)92x62 (B)73x45
4"	100	32	130	6202 Single Ball Bearing	130	M12x25	84	(A)92x62 (B)73x45
5"	125	32	145	6202 Single Ball Bearing	156	M12x25	95	(A)92x62 (B)73x45

MEDIUM DUTY PU CASTER (SINGLE BEARING)



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height of Installation	Thread Size	Radius of Rotation	Installation Size
								
3"	75	32	100	6202 Single Ball Bearing	107	M12x25	72	(A)92x62 (B)73x45
4"	100	32	130	6202 Single Ball Bearing	130	M12x25	84	(A)92x62 (B)73x45
5"	125	32	145	6202 Single Ball Bearing	156	M12x25	95	(A)92x62 (B)73x45

MEDIUM DUTY TPR CASTER (SINGLE BEARING)



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height of Installation	Thread Size	Radius of Rotation	Installation Size
								
3"	75	32	90	6202 Single Ball Bearing	107	M12x25	72	(A)92x62 (B)73x45
4"	100	32	120	6202 Single Ball Bearing	130	M12x25	84	(A)92x62 (B)73x45
5"	125	32	130	6202 Single Ball Bearing	156	M12x25	95	(A)92x62 (B)73x45

MEDIUM DUTY TPR CASTER (DOUBLE BEARING)



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height of Installation	Thread Size	Radius of Rotation	Installation Size
								
3"	75	32	90	6001 Double Ball Bearing	107	M12x25	72	(A)92x62 (B)73x45
4"	100	32	120	6001 Double Ball Bearing	130	M12x25	84	(A)92x62 (B)73x45
5"	125	32	130	6001 Double Ball Bearing	156	M12x25	95	(A)92x62 (B)73x45

MEDIUM DUTY RUBBER CASTER (SINGLE BEARING)



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height of Installation	Thread Size	Radius of Rotation	Installation Size
								
3"	75	32	100	6202 Single Ball Bearing	107	M12x25	72	(A)92x62 (B)73x45
4"	100	32	120	6202 Single Ball Bearing	130	M12x25	84	(A)92x62 (B)73x45
5"	125	32	140	6202 Single Ball Bearing	156	M12x25	95	(A)92x62 (B)73x45

MEDIUM DUTY RUBBER CASTER (DOBULE BEARING)



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height	Radius Rotation	Rotation radius (B Brake)	Plate Size	Thread Stem Size	Bolt Hole (mm)
										
3"	75	32	80	Dobule Ball Bearing	108	71	128	(A)80x60 (B)75x45	M12x25	12.3
4"	125	32	100	Dobule Ball Bearing	131	84	128	(A)80x60 (B)75x45	M12x25	12.3
5"	150	32	120	Dobule Ball Bearing	160	101	139	(A)80x60 (B)75x45	M12x25	12.3

MEDIUM DUTY PA CASTER (DOUBLE BEARING)



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height	Radius Rotation	Rotation radius (Brake)	Plate Size	Aperture (mm)
									
3"	75	32	150	Dobule Ball Bearing	108	72	128	(A)92x62 (B)72x45	8
4"	125	32	160	Dobule Ball Bearing	131	84	128	(A)92x62 (B)72x45	8
5"	150	32	180	Dobule Ball Bearing	160	95	139	(A)92x62 (B)72x45	8

HEAT RESISTANT PA CASTER (DOUBLE BEARING)



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height	Radius Rotation	Rotation radius (Brake)	Plate Size	Thread Stem Size	Aperture (mm)
										
3"	75	32	100	Dobule Ball Bearing	108	72	128	(A)92x62 (B)72x45	M12x30	9
4"	125	32	120	Dobule Ball Bearing	131	84	128	(A)92x62 (B)72x45	M12x30	9
5"	150	32	130	Dobule Ball Bearing	160	95	139	(A)92x62 (B)72x45	M12x30	9


HEAVY DUTY SERIES

Heavy-duty casters are suitable for a variety of industrial needs and can be customized to meet customer requirements, such as top plate size, bracket material, and load-bearing capacity

LOAD
200-1000KG



STRUCTURAL DIAGRAM

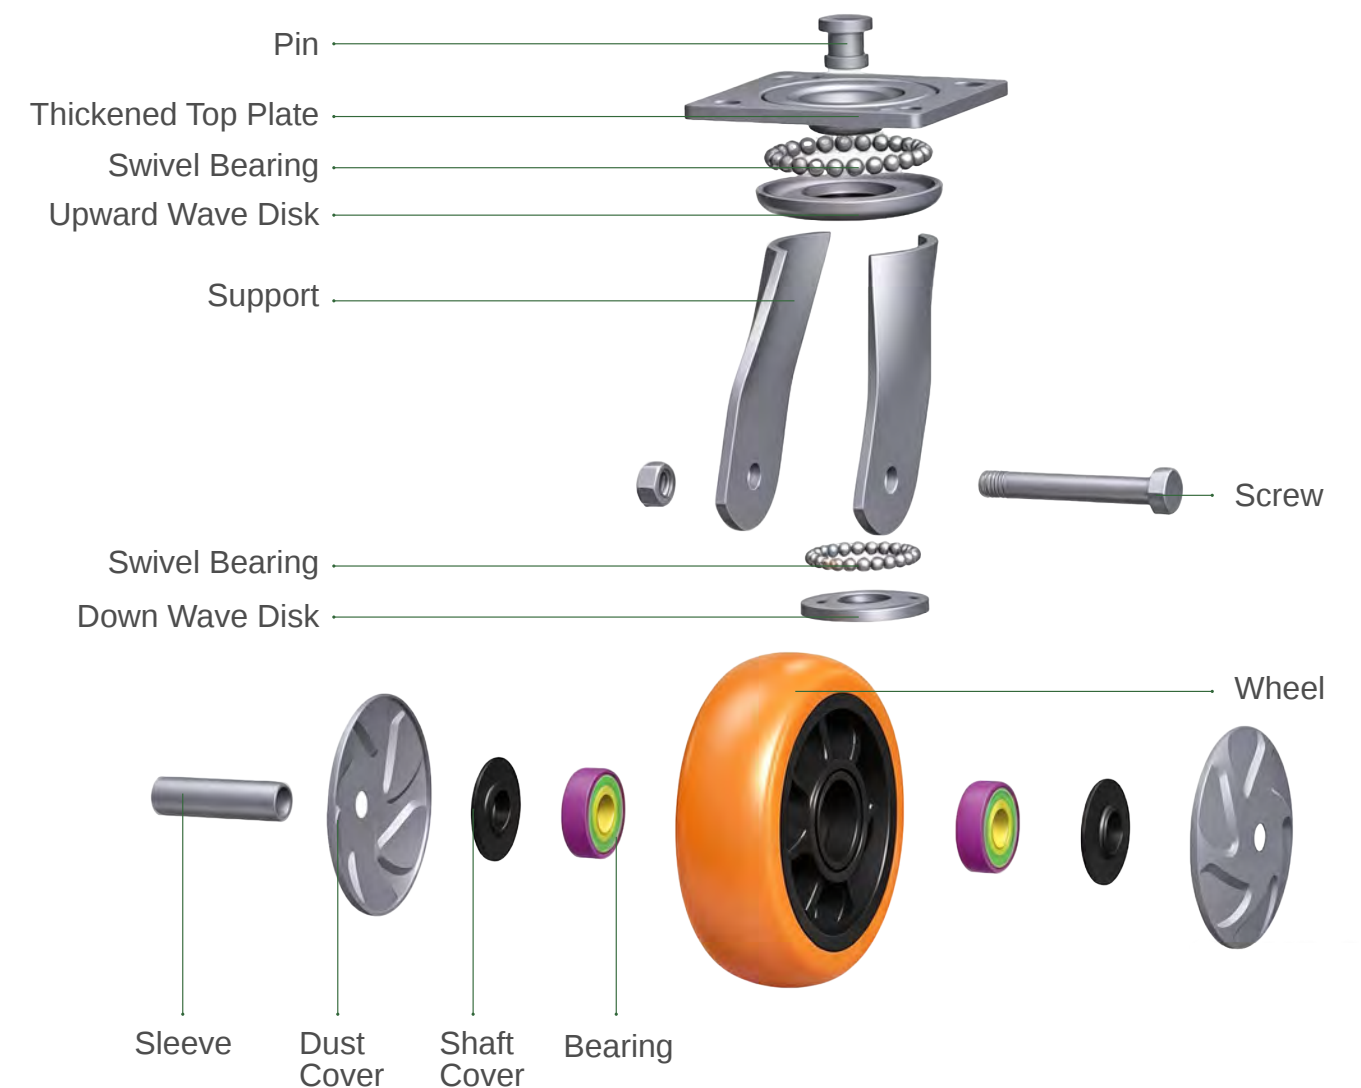

OPTIONAL BRACKET AND BRAKE TYPES

Since plated (Z) or Backing finish
savailable

Can choose tradition brake(A) or new
type(B)





High Strength PP Wheel



Elastic Rubber Wheel




High Wear-resistant PU Wheel



Black High Wear-Resistant PU Wheel



High Wear-resistant PU TextureWheel

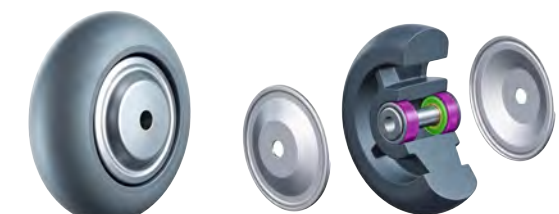

Elastic Grey TPR Wheel



High Wear-Resistant Rubber Foam Wheel



Inflatable Wheel

HEAVY DUTY PP CASTER



G4101D-1



G4101D-2



G4101D-3A



G4101D-3B



G4101D-4

Size	Diameter mm	Wheel Width mm	Load Capacity kg	Bearing	Height of Installation mm	Radius of Rotation mm	Rotate Radius of Brake A mm	Rotate Radius of Brake B mm	Installation Size	Installation Aperture
4"	100	45	290	6202 Double Ball Bearing	143	82	155	126	(A)115x100 (B)84x72	(C)11
5"	125	45	360	6202 Double Ball Bearing	165	93	155	135	(A)115x100 (B)84x72	(C)11
6"	150	45	410	6202 Double Ball Bearing	190	111	155	136	(A)115x100 (B)84x72	(C)11
8"	200	45	430	6202 Double Ball Bearing	241	139	155	147	(A)115x100 (B)84x72	(C)11

HEAVY DUTY PA CASTER (DOUBLE BEARING)



G4801-1



G4801-2



G4801-3A



G4801-3B



G4801-4

Size	Diameter mm	Wheel Width mm	Load Capacity kg	Bearing	Height mm	Radius Rotation mm	Rotation radius (B Brake) mm	Plate Size	Aperture (mm)
4"	100	50	500	6202 Dobule Ball Bearing	142	80	126	(A)114x100 (B)105x80	11
5"	125	50	600	6202 Dobule Ball Bearing	164	96	132	(A)114x100 (B)105x80	11
6"	150	50	700	6202 Dobule Ball Bearing	193	117	152	(A)114x100 (B)105x80	11
8"	200	50	1000	6202 Dobule Ball Bearing	240	151	151	(A)114x100 (B)105x80	11

HEAVY DUTY PU CASTER (ROUND SURFACE)



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height of Installation	Radius of Rotation	Rotate Radius of Brake A	Rotate Radius of Brake B	Installation Size	Installation Aperture
										
4"	100	50	290	6202 Double Ball Bearing	143	83	155	126	(A)115x100 (B)84x72	(C)11
5"	125	50	340	6202 Double Ball Bearing	165	96	155	135	(A)115x100 (B)84x72	(C)11
6"	150	50	400	6202 Double Ball Bearing	190	113	155	136	(A)115x100 (B)84x72	(C)11
8"	200	50	430	6202 Double Ball Bearing	241	145	155	147	(A)115x100 (B)84x72	(C)11

HEAVY DUTY PU CASTER (FLAT SURFACE)



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height of Installation	Radius of Rotation	Rotate Radius of Brake A	Rotate Radius of Brake B	Installation Size	Installation Aperture
										
4"	100	50	290	6202 Double Ball Bearing	143	83	155	126	(A)115x100 (B)84x72	(C)11
5"	125	50	340	6202 Double Ball Bearing	165	96	155	135	(A)115x100 (B)84x72	(C)11
6"	150	50	400	6202 Double Ball Bearing	190	113	155	136	(A)115x100 (B)84x72	(C)11
8"	200	50	430	6202 Double Ball Bearing	241	145	155	147	(A)115x100 (B)84x72	(C)11

HEAVY DUTY TPR CASTER



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height of Installation	Radius of Rotation	Rotate Radius of Brake A	Rotate Radius of Brake B	Installation Size	Installation Aperture
										
4"	100	50	210	6202 Double Ball Bearing	143	83	155	126	(A)115x100 (B)84x72	(C)11
5"	125	50	240	6202 Double Ball Bearing	165	96	155	135	(A)115x100 (B)84x72	(C)11
6"	150	50	280	6202 Double Ball Bearing	190	113	155	136	(A)115x100 (B)84x72	(C)11
8"	200	50	310	6202 Double Ball Bearing	241	145	155	147	(A)115x100 (B)84x72	(C)11

HEAVY DUTY NYLON CORE ELASTIC RUBBER CASTER



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height of Installation	Radius of Rotation	Rotate Radius of Brake A	Rotate Radius of Brake B	Installation Size	Installation Aperture
										
4"	100	50	100	6203 Double Ball Bearing	143	83	155	126	(A)115x100 (B)84x72	(C)11
5"	125	50	220	6203 Double Ball Bearing	165	96	155	135	(A)115x100 (B)84x72	(C)11
6"	150	50	280	6203 Double Ball Bearing	190	113	155	136	(A)115x100 (B)84x72	(C)11
8"	200	50	320	6203 Double Ball Bearing	241	145	155	147	(A)115x100 (B)84x72	(C)11

HEAVY DUTY IRON CORE PU CASTER



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height of Installation	Radius of Rotation	Rotate Radius of Brake A	Rotate Radius of Brake B	Installation Size	Installation Aperture
										
4"	100	50	290	6203 Roller Bearing/Double Ball Bearing	143	83	155	126	(A)115x100 (B)84x72	(C)11
5"	125	50	360	6203 Roller Bearing/Double Ball Bearing	165	96	155	135	(A)115x100 (B)84x72	(C)11
6"	150	50	400	6203 Roller Bearing/Double Ball Bearing	190	113	155	136	(A)115x100 (B)84x72	(C)11
8"	200	50	450	6203 Roller Bearing/Double Ball Bearing	241	145	155	147	(A)115x100 (B)84x72	(C)11

HEAVY DUTY IRON CORE PU CASTER



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height of Installation	Radius of Rotation	Rotate Radius of Brake A	Rotate Radius of Brake B	Installation Size	Installation Aperture
										
4"	100	50	290	6203 Double Ball Bearing	143	83	155	126	(A)115x100 (B)84x72	(C)11
5"	125	50	340	6203 Double Ball Bearing	165	96	155	135	(A)115x100 (B)84x72	(C)11
6"	150	50	400	6203 Double Ball Bearing	190	113	155	136	(A)115x100 (B)84x72	(C)11
8"	200	50	450	6204 Double Ball Bearing	241	145	155	147	(A)115x100 (B)84x72	(C)11

HEAVY DUTY ALUMINUM CORE PU CASTER



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height	Radius Rotation	Holder Thickness	Plate Size	Aperture (mm)
									
4"	100	50	400	Dobule Ball Bearing	142	80	5	(A)115x100 (B)84x72	11
5"	125	50	450	Dobule Ball Bearing	164	96	5	(A)115x100 (B)84x72	11
6"	150	50	500	Dobule Ball Bearing	193	117	5	(A)115x100 (B)84x72	11
8"	200	50	550	Dobule Ball Bearing	240	151	5	(A)115x100 (B)84x72	11

HEAVY DUTY ALUMINUM CORE PU CASTER



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height	Radius Rotation	Holder Thickness	Plate Size	Aperture (mm)
									
4"	100	50	400	Dobule Ball Bearing	142	80	5	(A)115x100 (B)84x72	11
5"	125	50	450	Dobule Ball Bearing	164	96	5	(A)115x100 (B)84x72	11
6"	150	50	500	Dobule Ball Bearing	193	117	5	(A)115x100 (B)84x72	11
8"	200	50	550	Dobule Ball Bearing	240	151	5	(A)115x100 (B)84x72	11

SUPER HEAVY DUTY CASTERS

Super heavy duty casters, customized load capacity (1 ton to 10 tons), Available in dual-wheel configuration, and made of PA, MC Nylon, PU, or steel.



LOAD
1 - 10 Tons

SUPER HEAVY DUTY IRON CORE PU CASTER



G5201-1



G5201-2



G5201-3

Size	Diameter	Wheel Width	Load Capacity	Bearing	Height	Plate Size
	 mm	 mm	 kg		 mm	
4"	100	50	1000	Dobule Ball Bearing 6203	160	(A)140x100 (B)105x70
5"	125	50	1000	Dobule Ball Bearing 6203	180	(A)140x100 (B)105x70
6"	150	50	1000	Dobule Ball Bearing 6203	200	(A)140x100 (B)105x70
8"	200	50	1500	Dobule Ball Bearing 6203	250	(A)140x100 (B)105x70
6"x3"	150	70	2000	Dobule Ball Bearing 6205	210	(A)130x130 (B)95x95
8"x3"	200	70	2000	Dobule Ball Bearing 6205	255	(A)130x130 (B)95x95
10"x3"	250	70	2000	Dobule Ball Bearing 6205	300	(A)160x160 (B)120x120
12"x3"	300	70	3000	Dobule Ball Bearing 6205	350	(A)160x160 (B)120x120

SUPER HEAVY DUTY NYLON CASTER



G5401-1



G5401-2



G5401-3

Size	Diameter	Wheel Width	Load Capacity	Bearing	Height	Plate Size
	 mm	 mm	 kg		 mm	
4"	100	57	900	Dobule Ball Bearing 6203	152	(A)140x100 (B)100x70
5"	125	57	1000	Dobule Ball Bearing 6203	176	(A)140x100 (B)100x70
6"	150	57	1200	Dobule Ball Bearing 6203	202	(A)140x100 (B)100x70
8"	200	57	1600	Dobule Ball Bearing 6203	252	(A)140x100 (B)100x70

LOW PROFILE CASTERS

Heavy duty series casters are used in industrial field.Has excellent floor protection features muting Performance, effort and slip resistance.

LOAD
70-600KG



SUPER HEAVY DUTY IRON CORE PU CASTER



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height	Bolt Hole (mm)	Plate Size	Thread Stem Size
	 mm	 mm	 kg		 mm	 mm		 mm
1.5"	40	30	70	————	62	12	(A)66x50 (B)49x32	M12x25
2"	50	30	80	————	73	12	(A)72x54 (B)56x38	M12x25
2.5"	65	40	180	Dobule Bearing	92	12	(A)95x68 (B)72x44	M12x25
3"	75	45	250	Dobule Bearing	105	12	(A)105x80 (B)83x60	M12x25

HEAVY DUTY LOW PROFILE PA CASTER



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height	Plate Size
	 mm	 mm	 kg		 mm	
2"	50	40	300	Dobule Bearing	79	(A)84x84 (B)64x64
2.5"	65	50	500	Dobule Bearing	93	(A)110x85 (B)85x60
3"	75	50	600	Dobule Bearing	105	(A)110x85 (B)85x60

WASTE BIN CASTERS

Special casters for industrial waste bins or material turnover boxes,featuring larger wheel diameters and easier-to-operate brakes.

LOAD
160-300KG



WASTE BIN IRON CORE CASTER



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height	Radius Rotation	Holder Thickness	Plate Size	Aperture (mm)
									
6"	160	50	160	Roller	195	130	3.0/4.0	(A)105x80 (B)85x70	11
8"	200	50	250	Roller	240	156	4.0/4.0	(A)105x80 (B)85x70	11
10"	250	50	300	Roller	290	185	4.0/4.0	(A)105x80 (B)85x70	11

WASTE BIN PLASTIC CORE CASTER



Size	Diameter	Wheel Width	Load Capacity	Bearing	Height	Radius Rotation	Holder Thickness	Plate Size	Aperture (mm)
									
6"	160	50	160	Bushing	200	130	3.0/4.0	(A)135x110 (B)105x80 or 85x70	11
8"	200	50	210	Bushing	240	156	4.0/4.0	(A)135x110 (B)105x80 or 85x70	11